



Liebherr LTM
1040 2.1

Mobile Crane

The LTM 1040-2.1 provides high load capacities over its entire working range. Its long, 4-piece telescopic boom can be extended with infinite adjustment and quickly to any length using a time-tested hydro-mechanical telescoping system and the telescoping process can also be completed whilst there is a load on the boom.

More information about our fleet can be found on our website.





www.westwoodcranes.co.uk



01922333125




info@westwoodcranes.co.uk

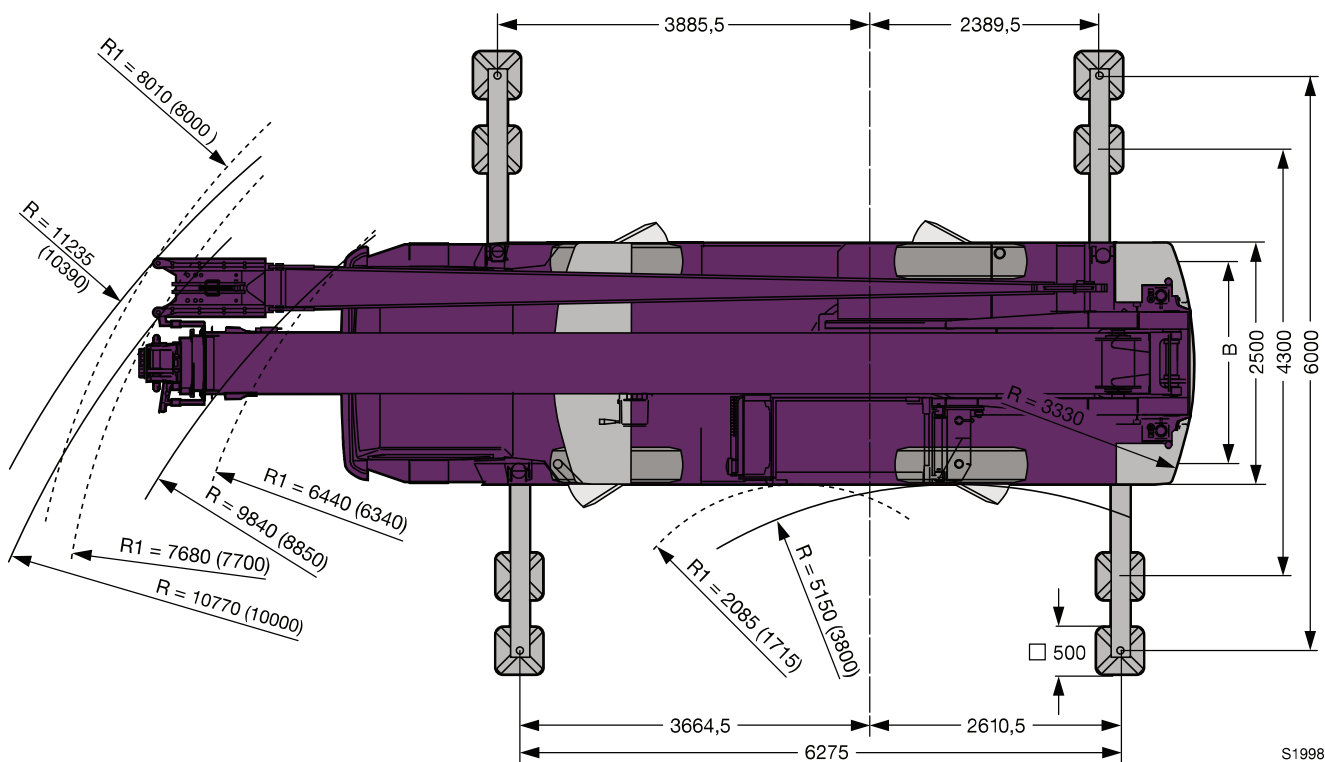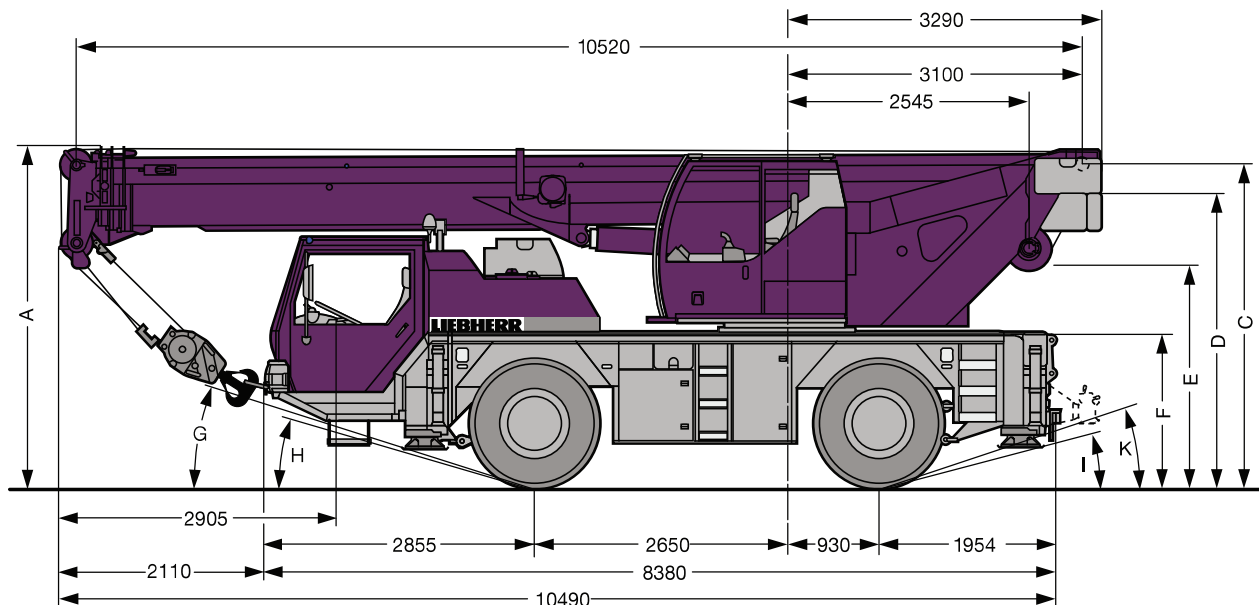

S1998

R₁ = Allradlenkung · All-wheel steering · Direction toutes roues · Tutti gli assi sterzanti · Dirección en todos los ejes · Поворот всеми колесами

	Maße · Dimensions · Encombrement · Dimensioni · Dimensiones · Размеры mm										
	A	A 100 mm *	B	C	D	E	F	G	H	I	K
14.00 R 25	3550	3450	2094	3369	3079	2304	1598	18°	17°	15°	19°
16.00 R 25	3600	3500	2054	3419	3129	2354	1648	20°	19°	17°	21°

* abgesenkt · lowered · abaissé · abbassato · suspensión abajo · шасси осажено



Main boom - Full Rig Duties

		10,5 m		15,4 m	20,3 m	25,2 m	30,1 m	32,6 m	35 m		
m		*								m	
2,5	40										2,5
3	35		31	19,7							3
3,5	32,5		28	20,2	17,6						3,5
4	29,2		25,5	20,6	18	15,2					4
4,5	26,2		23,4	21,2	18,3	15	10,9				4,5
5	24,3		21,5	21,7	19,3	14,4	10,7	9,1			5
6	19,9		18,5	18,7	17,7	13,3	10,2	8,8	7,4		6
7	15,7		15,3	15,5	14,6	12,3	9,5	8,5	7,1		7
8				12,9	12,3	11,4	8,9	8,1	6,8		8
9				10,6	10,6	10	8,3	7,7	6,6		9
10				9	9,1	8,8	7,8	7,2	6,3		10
11				7,7	7,8	7,7	7,3	6,9	6		11
12				6,7	6,8	6,9	6,6	6,5	5,8		12
13					6	6,1	5,9	5,9	5,5		13
14					5,3	5,4	5,4	5,3	5,2		14
15					4,7	4,8	4,9	4,8	4,7		15
16					4,3	4,3	4,4	4,4	4,3		16
17					3,8	3,9	4	4	3,9		17
18						3,5	3,6	3,6	3,6		18
19						3,2	3,3	3,3	3,3		19
20						2,9	3	3	3		20
21						2,7	2,7	2,8	2,8		21
22							2,5	2,5	2,5		22
23							2,3	2,3	2,3		23
24							2,1	2,1	2,1		24
25							1,9	1,9	1,9		25
26							1,7	1,8	1,8		26
27								1,6	1,6		27
28								1,5	1,5		28
29								1,3	1,3		29
30									1,2		30
31									1,1		31

* nach hinten / over rear / sur arrière / sul posteriore / hacia atrás / при выдвинутой назад стреле

TAB 1370001 / 1370013

Specifications

Max Capacity	40t
Max Boom	35m
Max Radius	31m
Standard Outrigger Pads	900m dia
Special Additions	Telescopic Duties

